



B.16

SHOTBOLT SOLENOID LOCKING POWER OFF



BDC.16

Application use -

Locking doors, hatches, drawers, or used as positioning stop on production tools.
The shotbolt is powered ON to unlock. Its internal spring ensures the bolt returns to locked position after the power is switched off.

Maximum radial force: **100Kg**

Stroke: **13mm**

Plunger Input and Output Force: **200g**

Standard voltage: **24V DC**

Possible voltages: **From 12 - 205 VDC**

Power: **12W - 20°C**

Duty cycle: **100% (Permanent Service)**

Return Spring: **Internal**

Protection rating: **IP40**

Service Operating Temperature: **-5°C +40°C**

Temperature Rating: **B**

Weight: **450g**

Dimensions (mm): **90x62x38**

According to Standards: **NF C 79-300**

Markets: **Automation and Industry**

Factory reference

BDC16 = 8.13.AT.83



We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

B16 Rev 3 - 2021

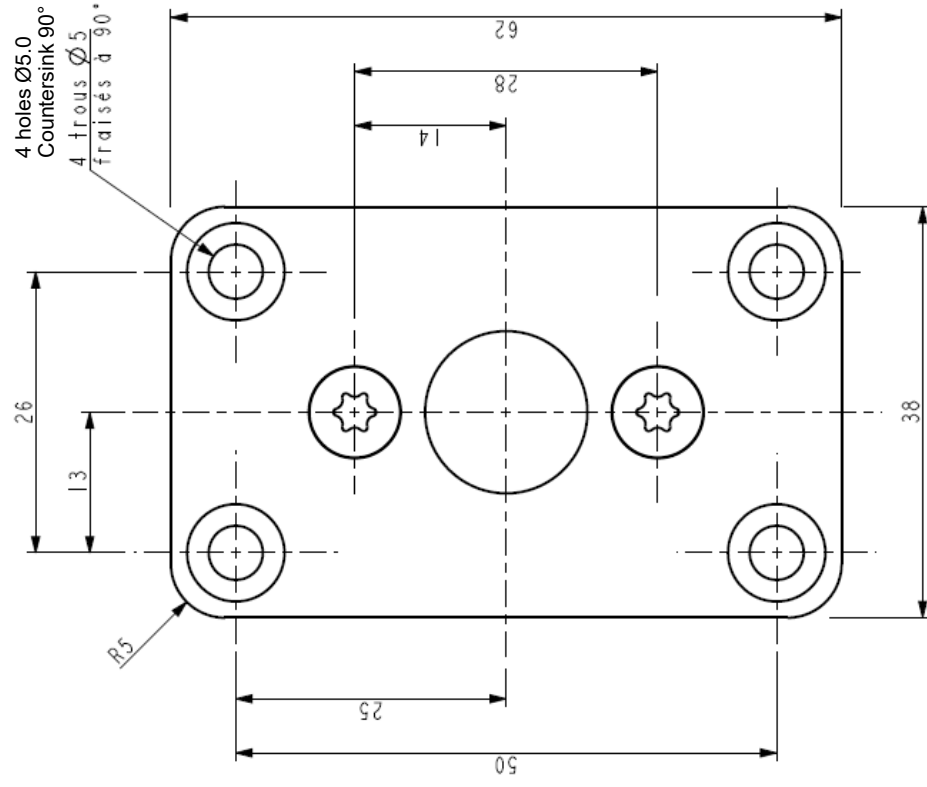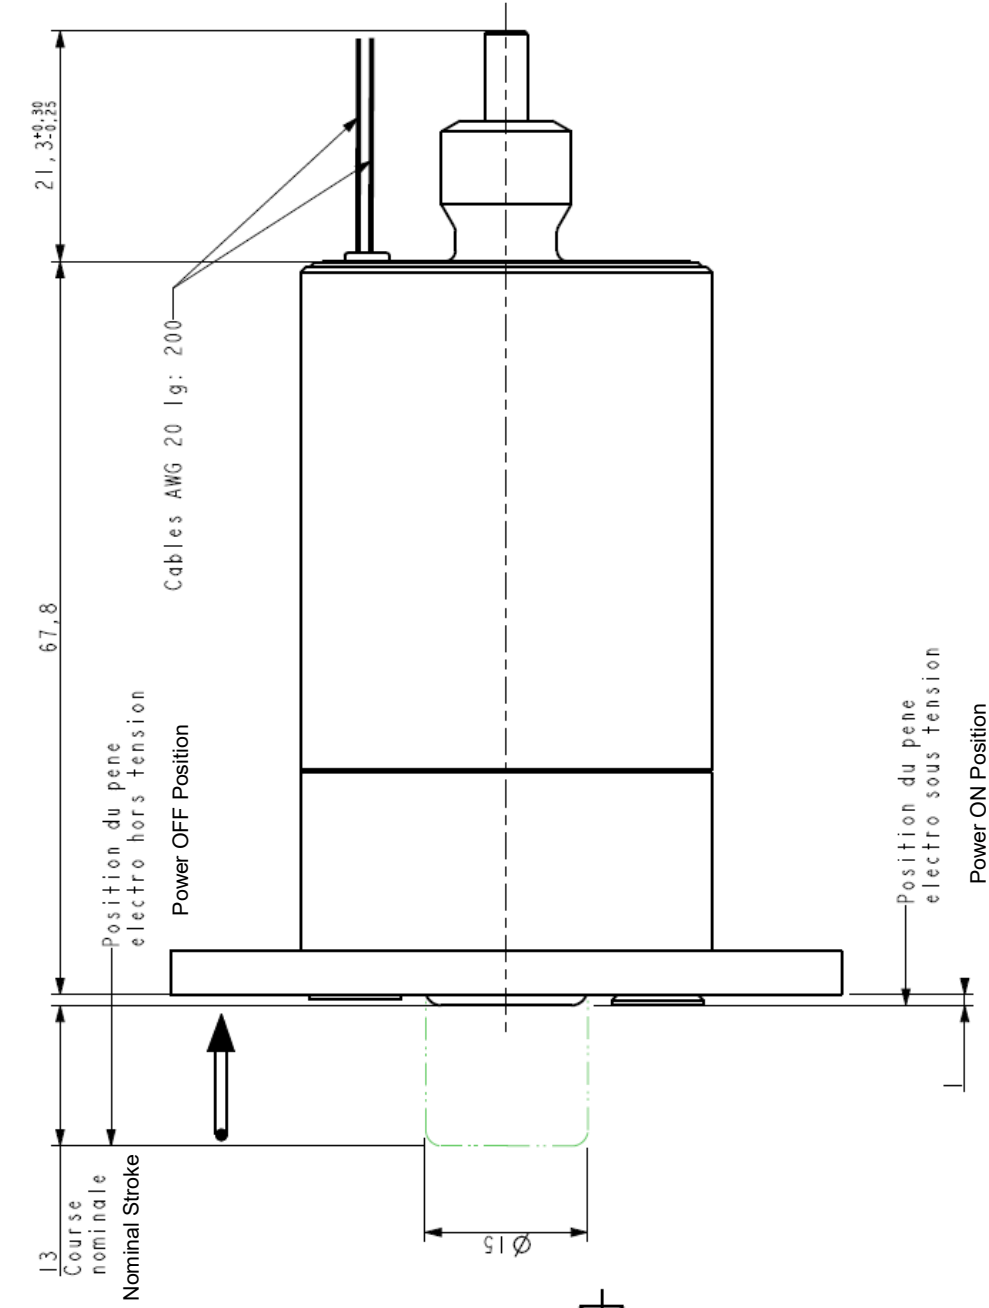

We reserve the right to alter or amend designs without prior notice.

[illegible]