



B3 AC & DC LINEAR SOLENOID

Availability


AC or DC Standard Stroke
PULL - THRUST - PULL & THRUST
DC Long Stroke

Solenoid shown in energised position


	Dim 'T'	'S'
BAC3	26	10.5
BDC3	32	16.6

Weight complete 156g
Plunger weight 35g max

Forces shown are at
working temperature

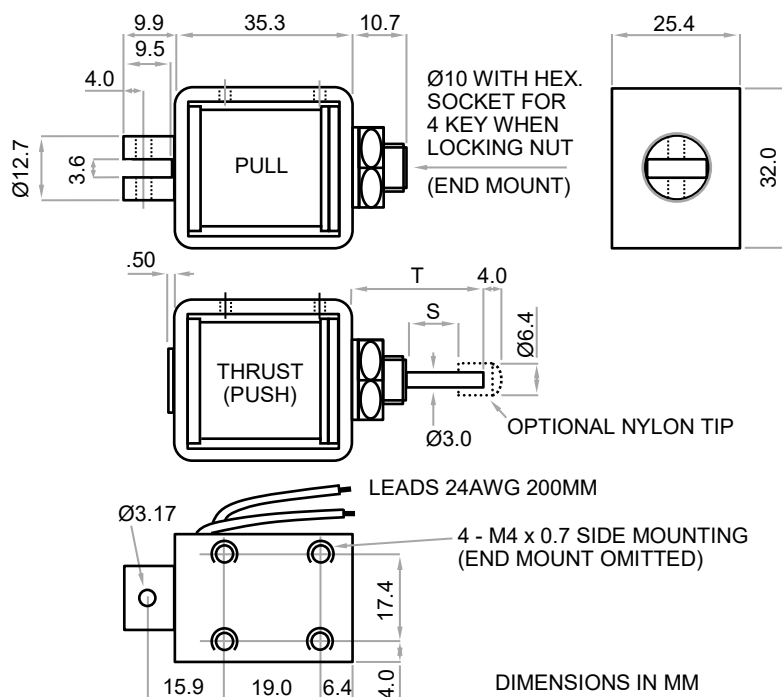


BAC3

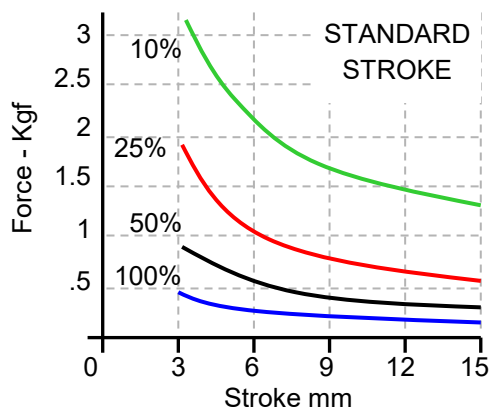


AC Closed VA

100% Rtg = 9VA
50% Rtg = 20VA
25% Rtg = 40VA
10% Rtg = 100VA

BDC3

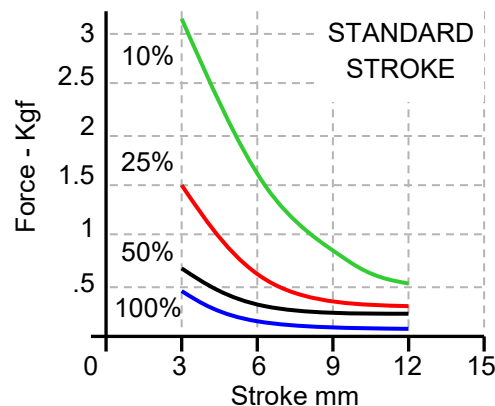


BAC3

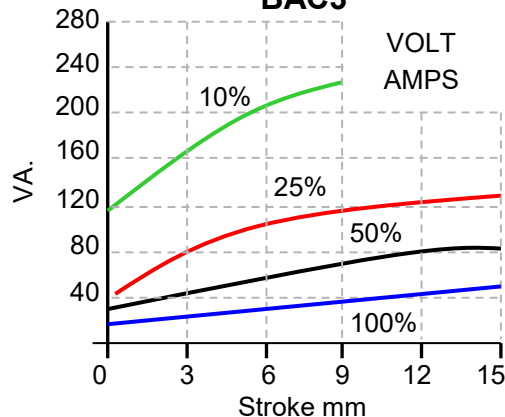

DC Watts

100% Rtg = 6.5W
50% Rtg = 13W
25% Rtg = 26W
10% Rtg = 65W

BDC3L

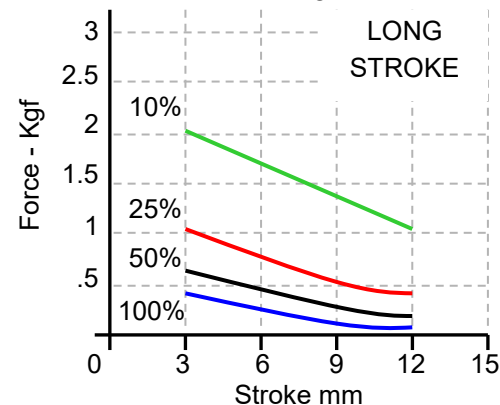

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd



1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

☎ +44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

B3 Rev 6 - 2019

CODING

Please use the standard coding below when advising your design requirement.

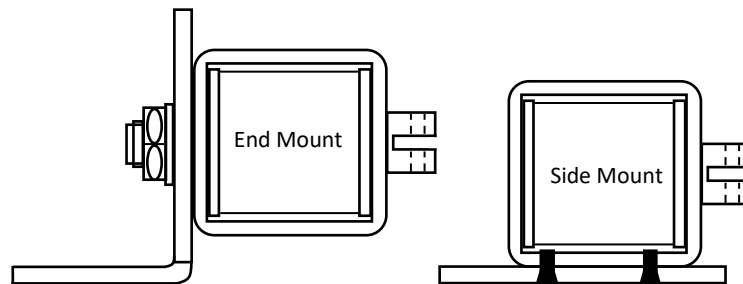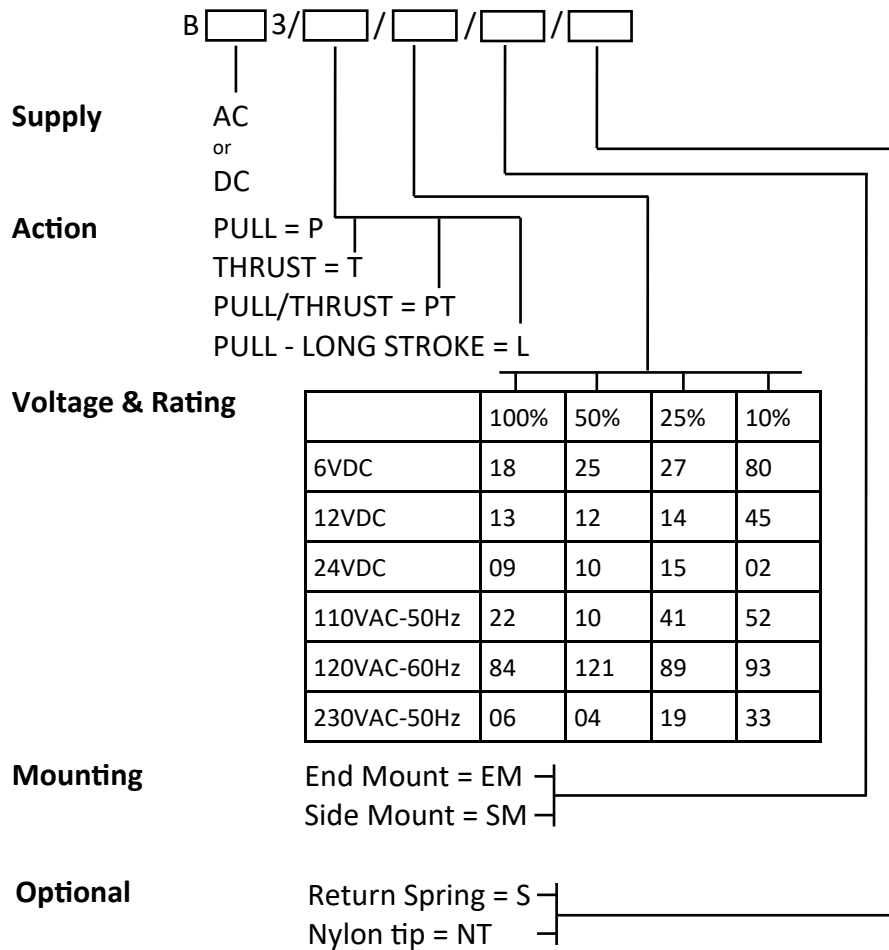

Example - BDC3 / P / 09 / SM / S

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should you require spade connectors please contact our sales team.

We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk