






B5 AC & DC LINEAR SOLENOID

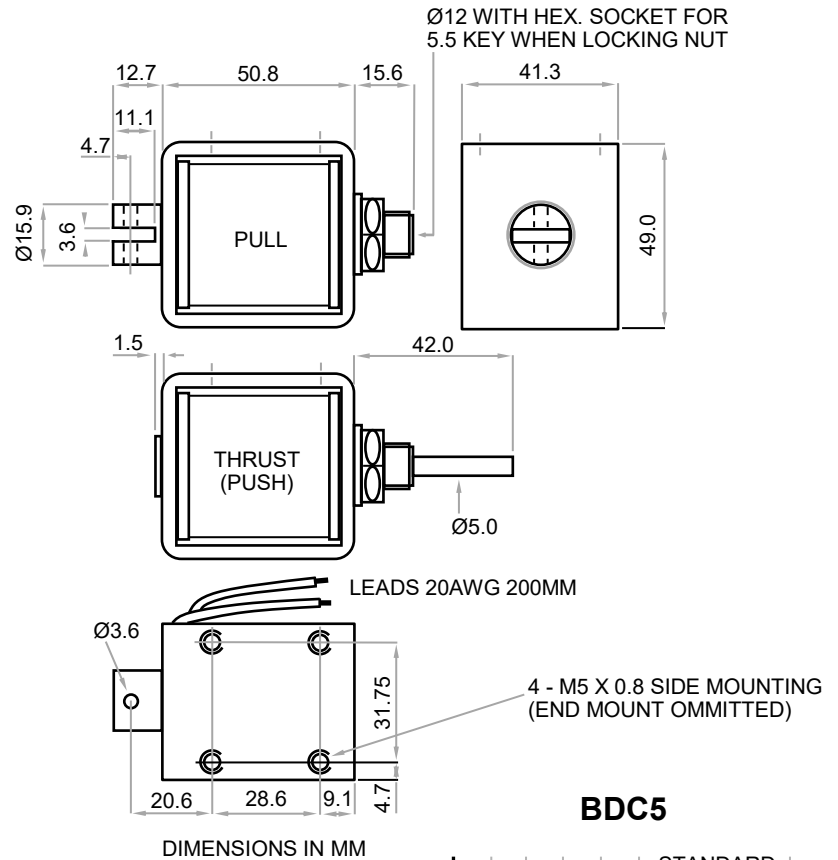

BAC5

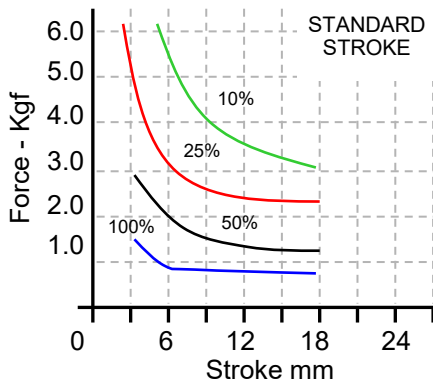

BAC5

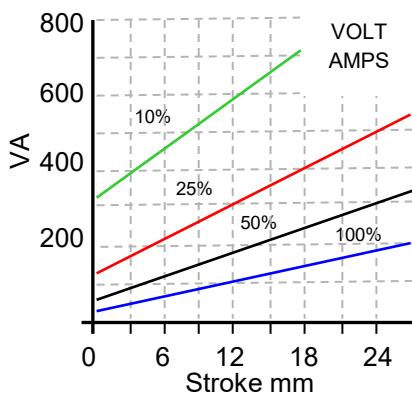

AC Closed VA

100% Rtg = 30VA

50% Rtg = 70VA

25% Rtg = 120VA

10% Rtg = 300VA

DC Watts


100% Rtg = 15W

50% Rtg = 30W


25% Rtg = 60W

10% Rtg = 150W

BDC5

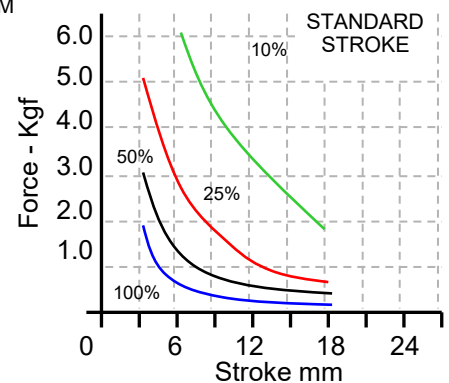

BDC5L

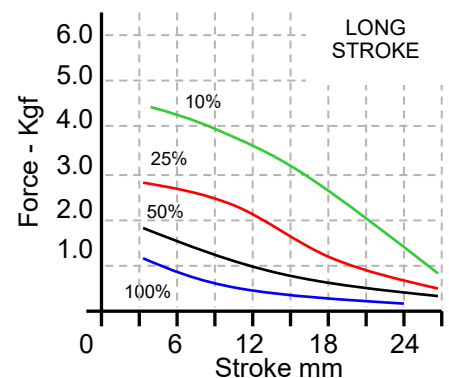

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****

We reserve the right to alter or amend designs without prior notice.



HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

CODING

Please use the standard coding below when advising your design requirement.

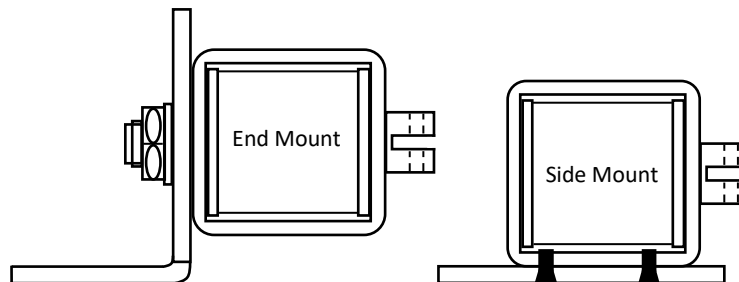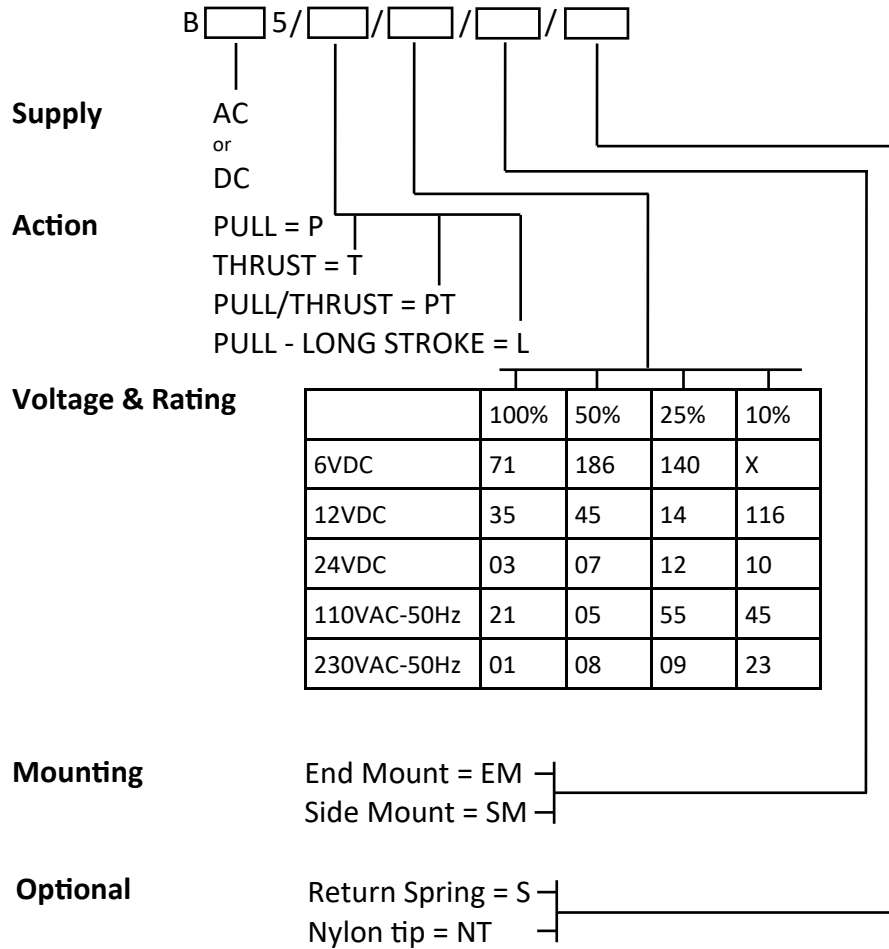

Example - BDC5 / P / 03 / SM / S

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should you require spade connectors please contact our sales team.

We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk