



BDC2 DC LINEAR SOLENOID


Availability

For DC Only
PULL - THRUST - PULL & THRUST
Side Mount Fixing
For operation over 50VDC
please enquire as to feasibility.


**Solenoid shown in
energised position**

Weight complete 57g
Plunger weight 10g max

Forces shown at working
temperature

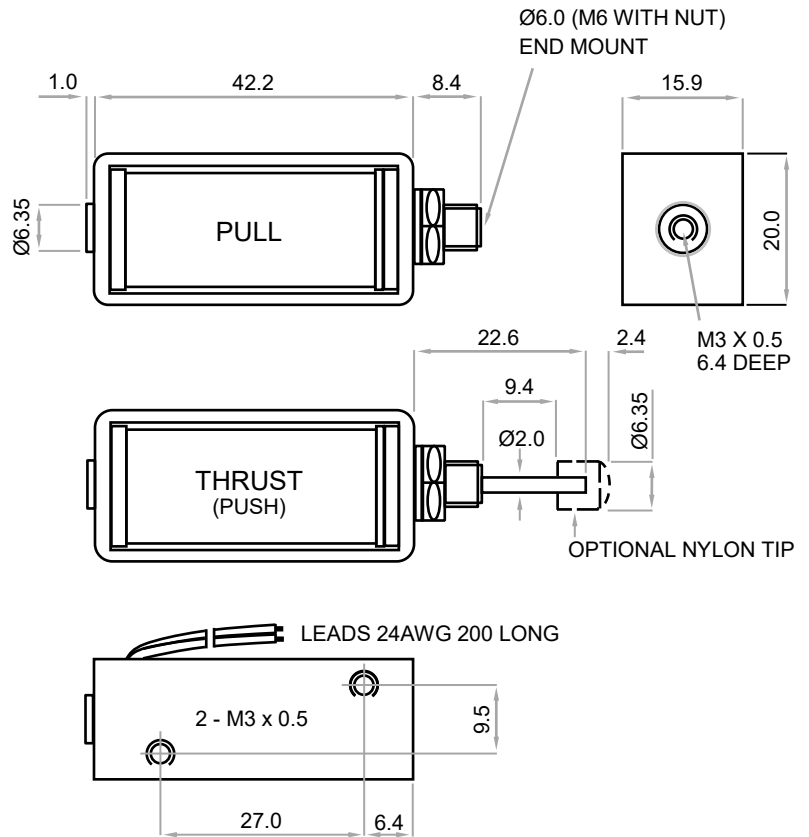

DIMENSIONS IN MM

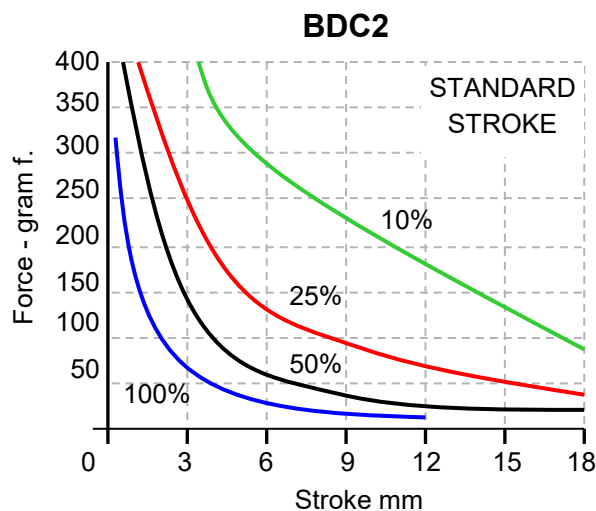

DC Watts

100% Rt_g = 5W

50% Rt_g = 10W

25% Rt_g = 20W

10% Rt_g = 50W

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd


1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

B2 Rev 6 - 2019

CODING

Please use the standard coding below when advising your design requirement.

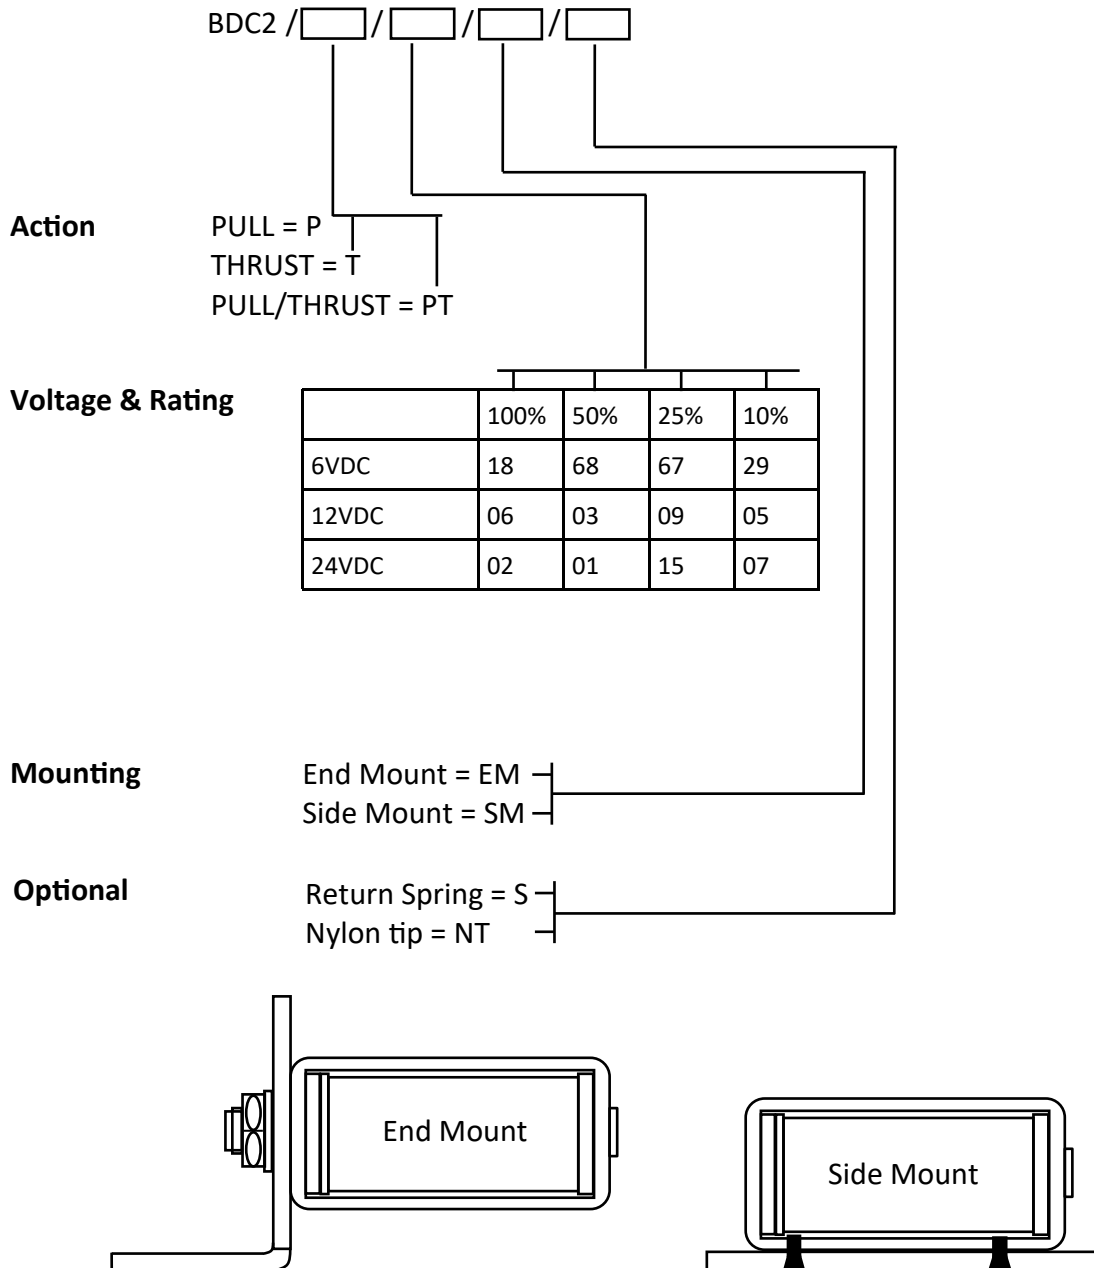

Example - BDC2 / T / 15 / SM / SNT

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should you require spade connectors please contact our sales team.

We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

B2 Rev 6 - 2019