

B7 DC LINEAR SOLENOID

Availability


DC Standard Stroke
PULL - THRUST - PULL/THRUST
DC Long Stroke PULL
(THRUST on request)

**Solenoid shown in
energised position**



Weight complete 1.1Kg
Plunger weight 180g max

Forces shown are at
working temperature

Ø12 WITH HEX. SOCKET FOR
5.5 KEY WHEN LOCKING NUT
(END MOUNT)

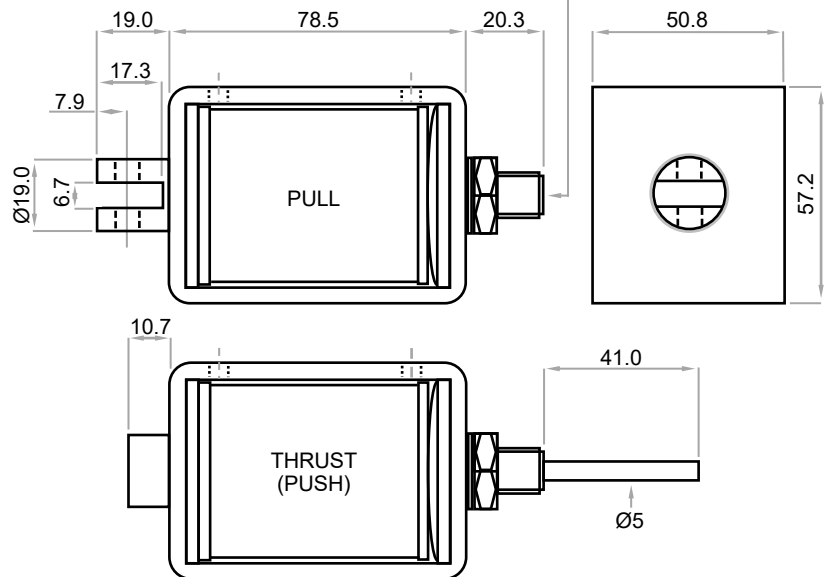

DIMENSIONS IN MM

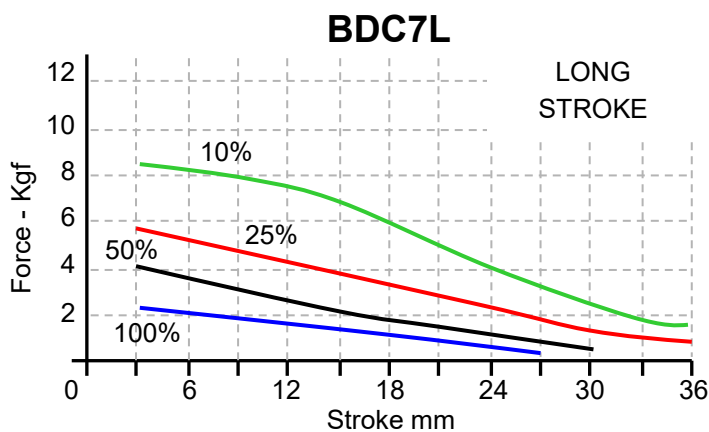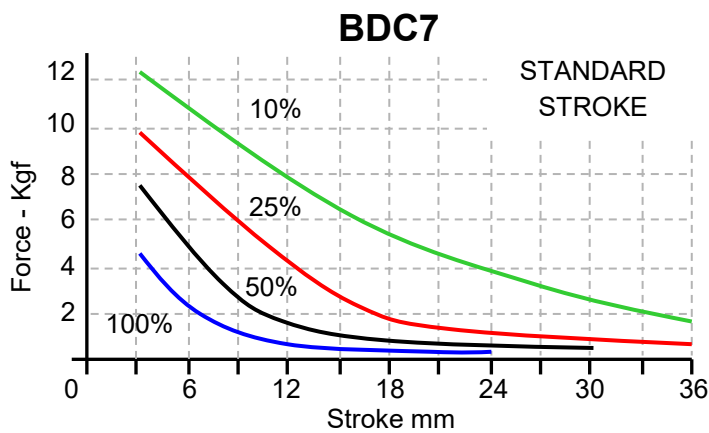

DC Watts

100% R_{tg} = 20W

50% R_{tg} = 40W

25% R_{tg} = 80W

10% R_{tg} = 200W

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
We reserve the right to alter or amend designs without prior notice.



HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

CODING

Please use the standard coding below when advising your design requirement.

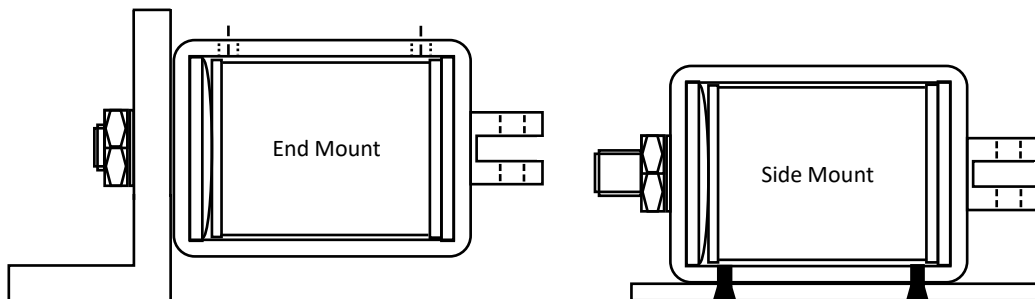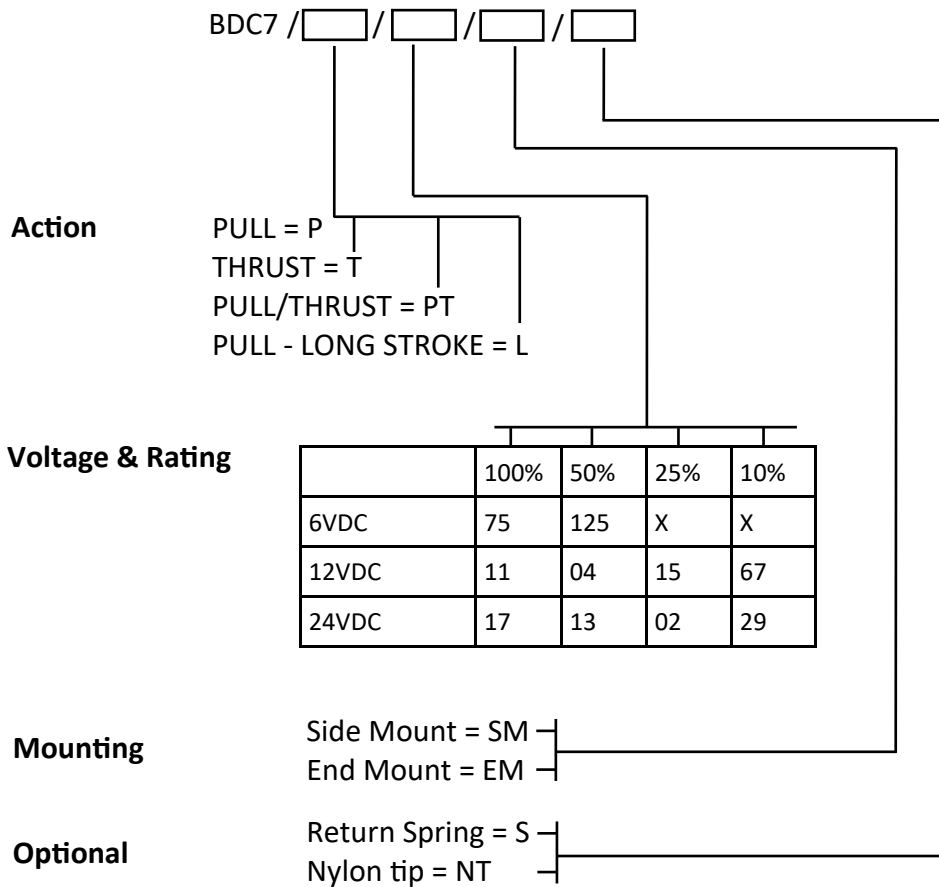

Example - BDC7 / L / 17 / EM / S

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

All solenoids come with flying leads as standard, should you require spade connectors please contact our sales team.

We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk