



CLP12 INDUSTRIAL SOLENOID 8.13.AB.83

Availability

For DC only.

Stroke 14mm

Pull or Push



Standard Voltage 24V DC

Possible Voltage 12 - 220v DC

IP40

**Solenoid shown in
energised position**

Weight complete 300g
Plunger weight 60g

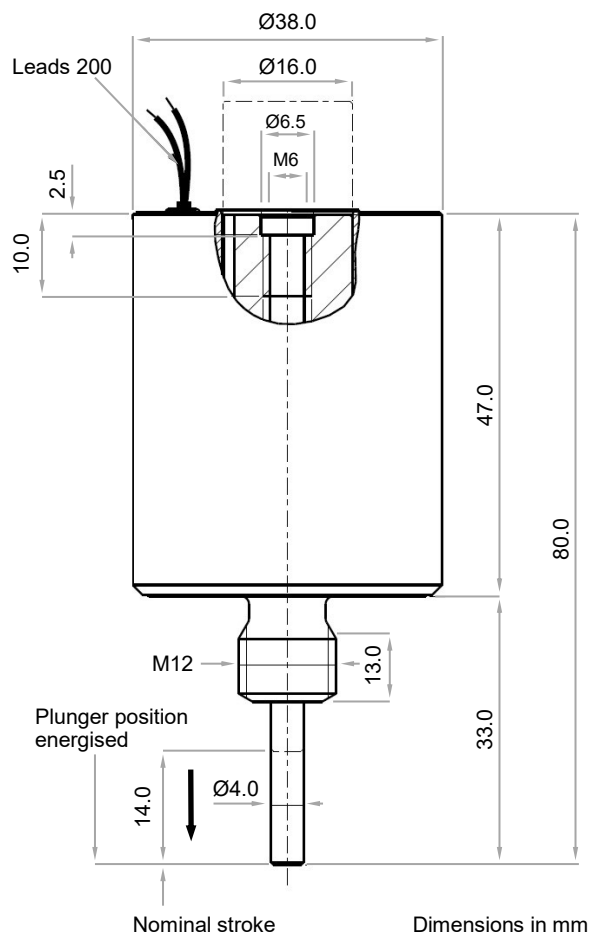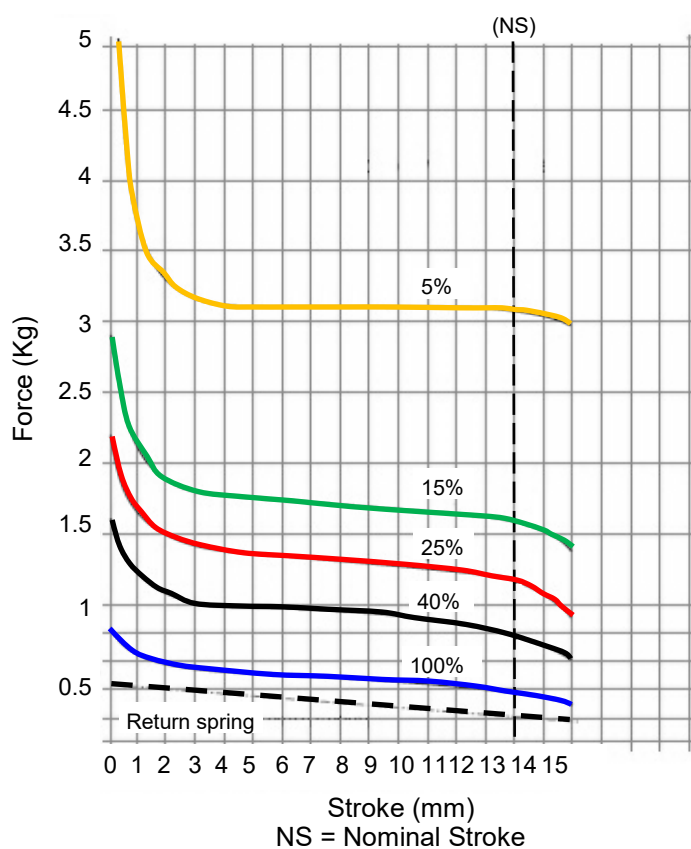

Forces shown are at working temperature
Cold forces are higher

DC Watts

Cont Rtg = 12W

40% Rtg = 28W

25% Rtg = 40W

15% Rtg = 70W

5% Rtg = 200W

We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

CLP12 Rev 3 - 2023