




CLP5 DC TUBULAR SOLENOID

Availability

DC Standard Stroke
PULL - THRUST - PULL & THRUST
DC Long Stroke...PULL

**Solenoid shown in
energised position**


Weight complete 305g approx
Plunger weight 73g max

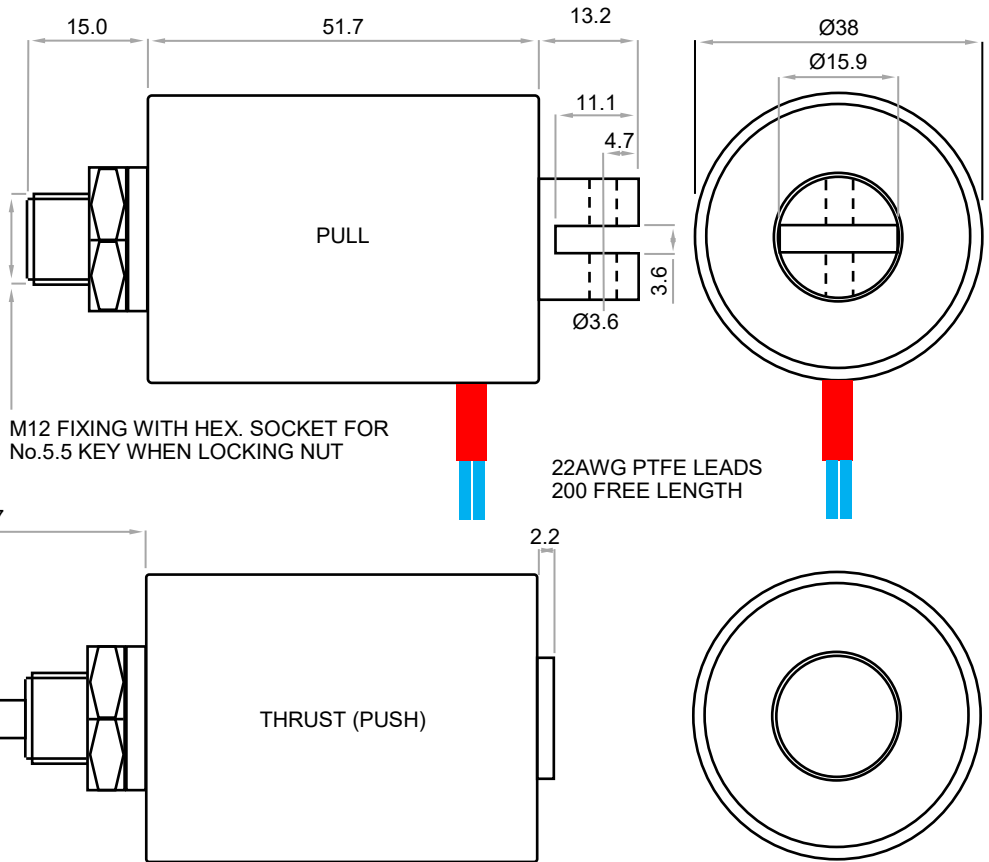

DIMENSIONS IN MM

CLP5

STANDARD
STROKE

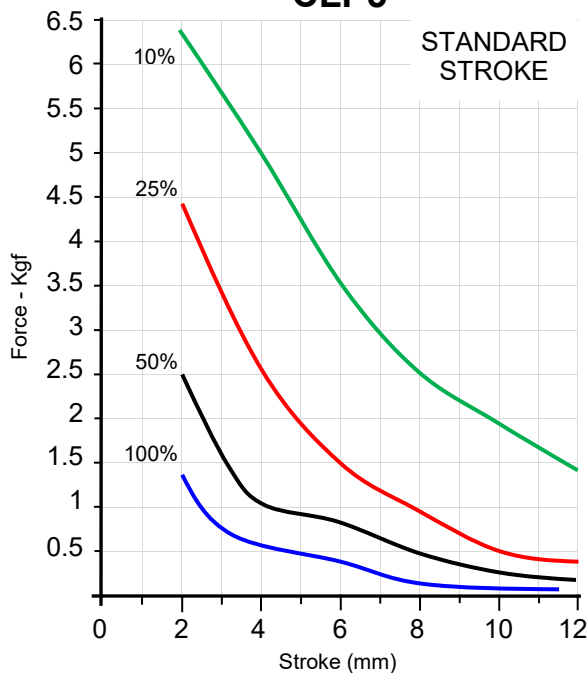

Forces shown are at
working temperature
Cold forces are higher

DC Watts

100% Rtg = 12W


50% Rtg = 24W

25% Rtg = 48W

10% Rtg = 120W

CLP5L

LONG
STROKE

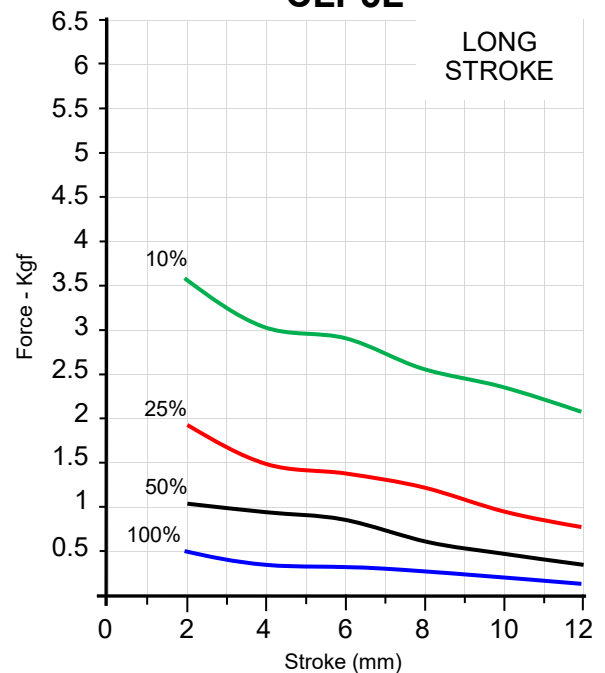

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd


1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

CLP5 Rev 3 - 2022

CODING

Please use the standard coding below when advising your design requirement.

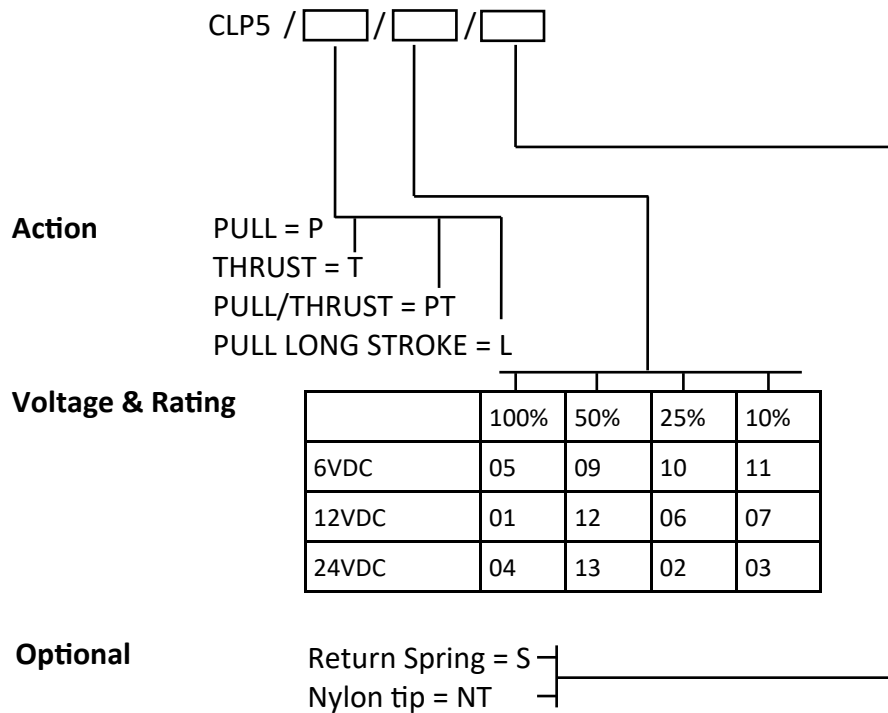

Example - CLP5 / P / 02 / S

Other voltages are available on request.

Fixing, plunger coupling, thrust rods and lead length can all be customised.

**** Please note: Fixing, plunger coupling, thrust rods and lead length can all be customised ****
We reserve the right to alter or amend designs without prior notice.

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@bensonsolenoids.co.uk 🌐 www.bensonsolenoids.co.uk

CLP5 Rev 3 - 2022