



FIRE PROTECTION



M102XX

Electromagnetic FIRE DOOR HOLDERS - Flush Mounting

Door holders are generally linked to a fire system that will automatically release the doors in case of a fire by switching the power off. If required, it can also be manually operated by the release button.

STANDARD FEATURE

Fire proof door holders in a steel construction, with a spring loaded device to eliminate residual magnetism, release button, two electrical terminal connections and two plastic cable glands.

Suited for every type of fire protection system.

Complete with fitting instructions, flat keeper or swivel keeper plate.

TECHNICAL SPECIFICATIONS

Holding Force Power ON - **20Kgf**

Voltage - **24VDC or 48VDC**

Nominal Power @ 20°C - **0.6W**

Protection Class - **III**

Protection Rating - **IP42 EN60529**

Weight - **460g**

Temperature Class - **B**


Temperature Range - **-5°C / +40°C**

Electrical Connection - **Terminal Board**


Box Colour - **Grey RAL 9002 painted steel**

Conformity with Standards -

NF S 61 937 1&2, EN1155:1997 + A1:2002 + AC:2006

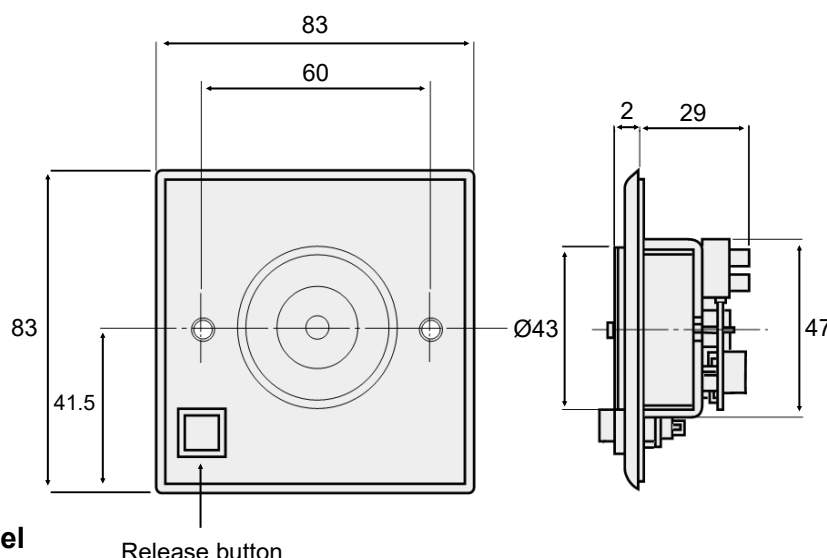

ITEM	Holding Force	Voltage	Keeper Plate
M10212	20 Kgf	24VDC	FLAT
M10222	20 Kgf	48VDC	FLAT
M10211	20 Kgf	24VDC	SWIVEL
M10221	20 Kgf	48VDC	SWIVEL

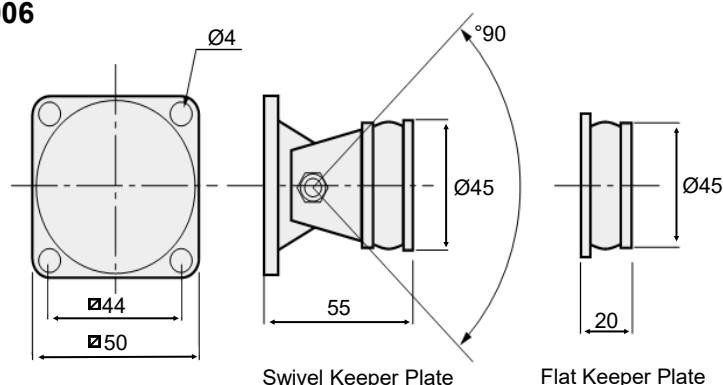

Dimensions in mm

HE & BS Benson Ltd

1 Laureate Industrial Estate, Exning Road, Newmarket, Suffolk UK CB8 0AR

+44(0)1638 663535 — 663130 ✉ sales@hebsbenson.co.uk 🌐 www.hebsbenson.co.uk